

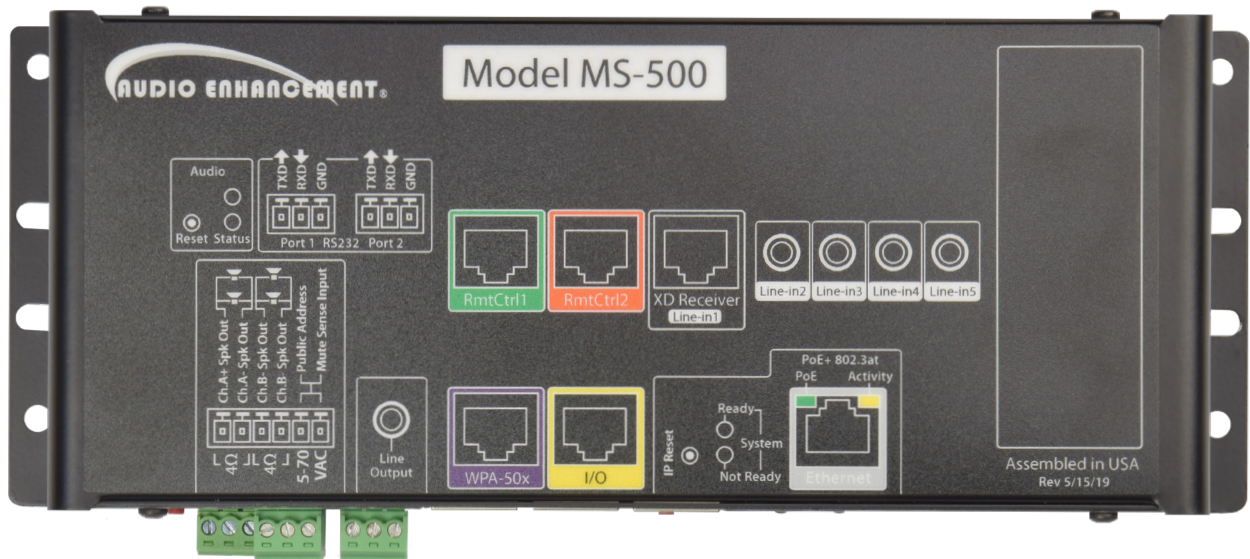


MS-500 OPTIMUM AMPLIFIER

QUICK START GUIDE

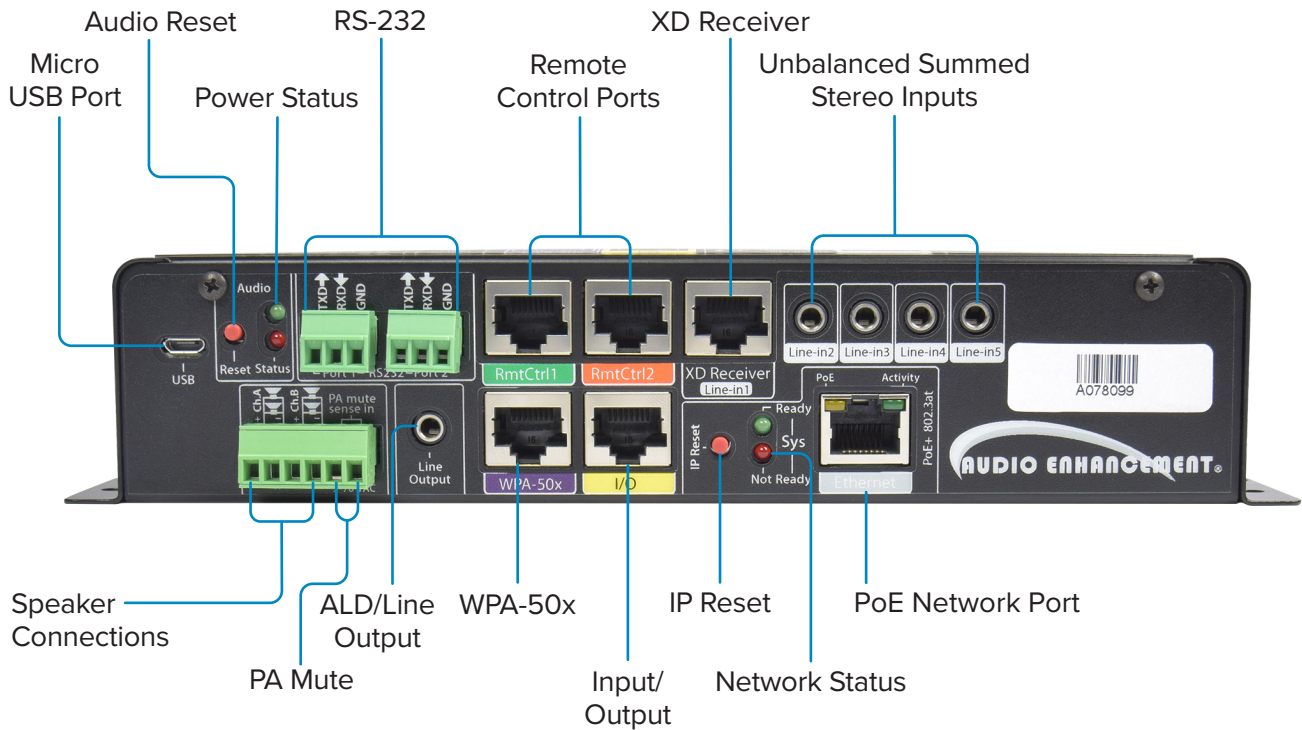

SPEAKER CONNECTIONS

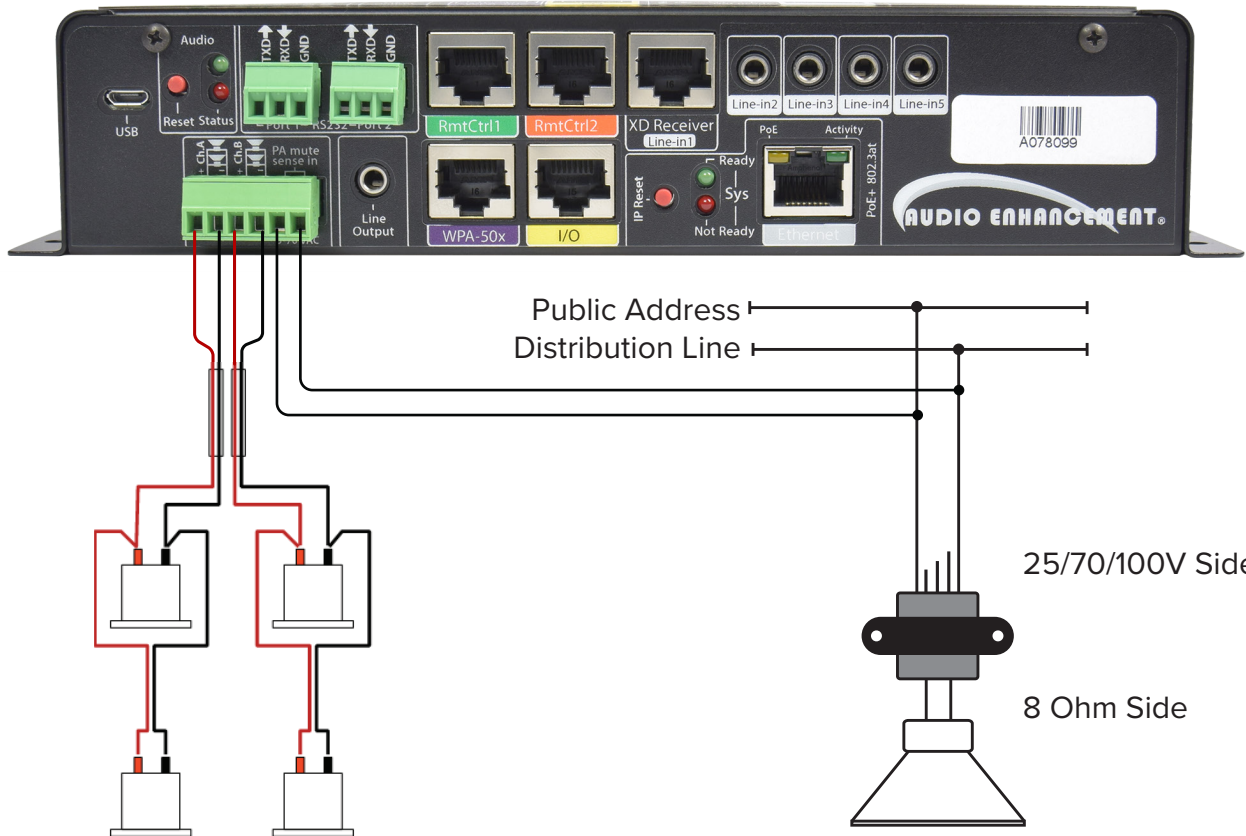


When using 4 speakers, wire ceiling speakers parallel in the ceiling—bringing one speaker wire per pair to the MS-300 amplifier channel.


When connecting the Page Override Terminals, use Standard 2-conductor speaker wire. Connect the wires from the Page Override Terminals to the 25/70/100V side of the transformer. The polarity does not matter.

REMINDER

Speaker wire with tinned leads can be used on the spring loaded terminals on the speaker. However, ensure that the tinned portion of the leads are cut off before being inserted into the green terminal blocks on the amplifier so that bare copper is being captured by the screw compression terminals.

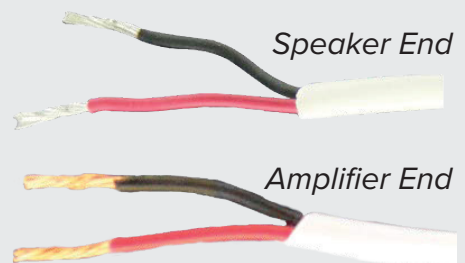

CONNECTING XD RECEIVER TO MS-500 FOR SAFE SYSTEM

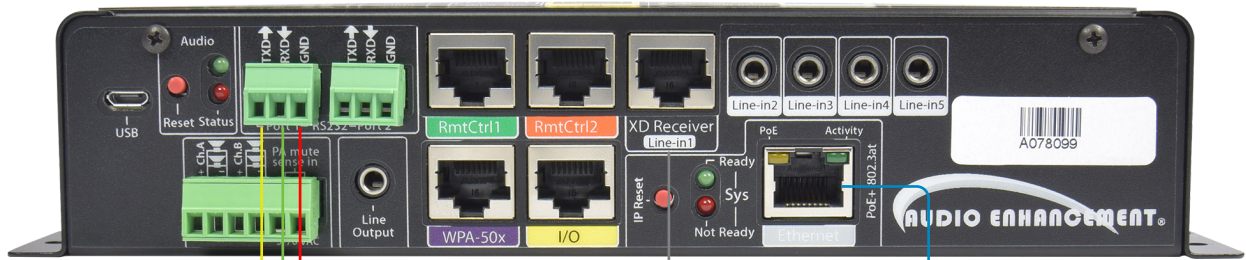

School LAN Network

CAT6 Cable

