

# INFOVIEW DISPLAY

## SPEC SHEET



The EPIC (Education Paging & Intercom Communications) System® **InfoView Display** is designed specifically for the K-12 campus. With a PoE powered, 24" Full HD display, this high-performance, energy-efficient, world-class visual messaging device delivers power and data over a single ethernet cable, offering greatly increased flexibility with location and positioning.


RJ45 (PoE)



Left View



Front View

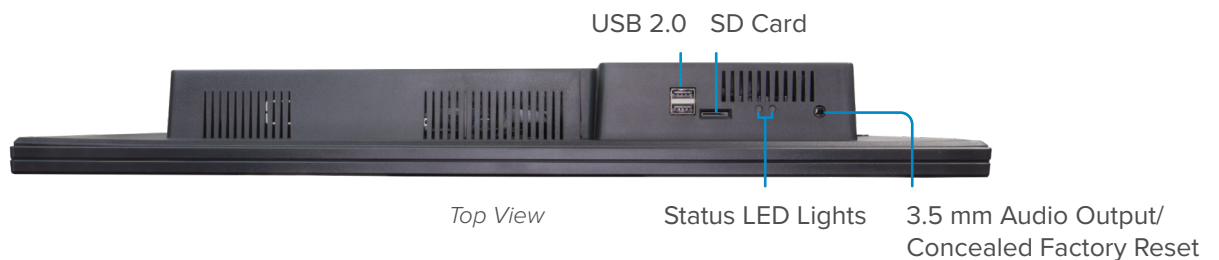

Top View

Status LED Lights

3.5 mm Audio Output/  
Concealed Factory Reset

# SPECIFICATIONS

INFOVIEW DISPLAY	
Network	10/100 Auto Sensing Megabit Ethernet (RJ45)
Audio	High Definition Audio Codec
VESA Wall Mount	75 x 75 mm
Warranty	3 Year Warranty on parts and labor against manufacturing defects
Regulatory	CE/FCC B/EN60950/RoHS
Recycle/Disposal	Dispose of in Accordance with Local, State and Federal Laws
Resolution	Up to 1920 x 1080, 32-bit Color
Display	24" Diagonal
Aspect Ratio	16:9
Graphics	Integrated Graphics Engine
POWER	
Voltage	PoE 802.3 AT+
Consumption	> 30 W (Average)
CONNECTORS	
LAN	(1) RJ45
USB	(2) USB 2.0
Headphone	(1) 3.5 mm
OPERATING CONDITIONS	
Temperature	Operating: 41° - 95° F (5° - 35° C) Storage: -10° - 140° F (-23° - 60° C)
Humidity	10 - 90% (non-condensing)
WEIGHT AND DIMENSIONS	
Weight - No Accessories	6.75 lbs (108 oz)
Dimensions	13.2 (H) x 21.9 (W) 2.6 in (335 x 556 x 66 mm)