


CA-70 SENTINEL AMPLIFIER

SPEC SHEET



The **CA-70 Sentinel Amplifier** classroom amplifier with integrated receiver provides quality audio for teachers, students, and multimedia sources. This unit is equipped with an Eco Mode, which automatically reduces power consumption when no signal is present. It also features a PA voice override, so announcements can still be heard.

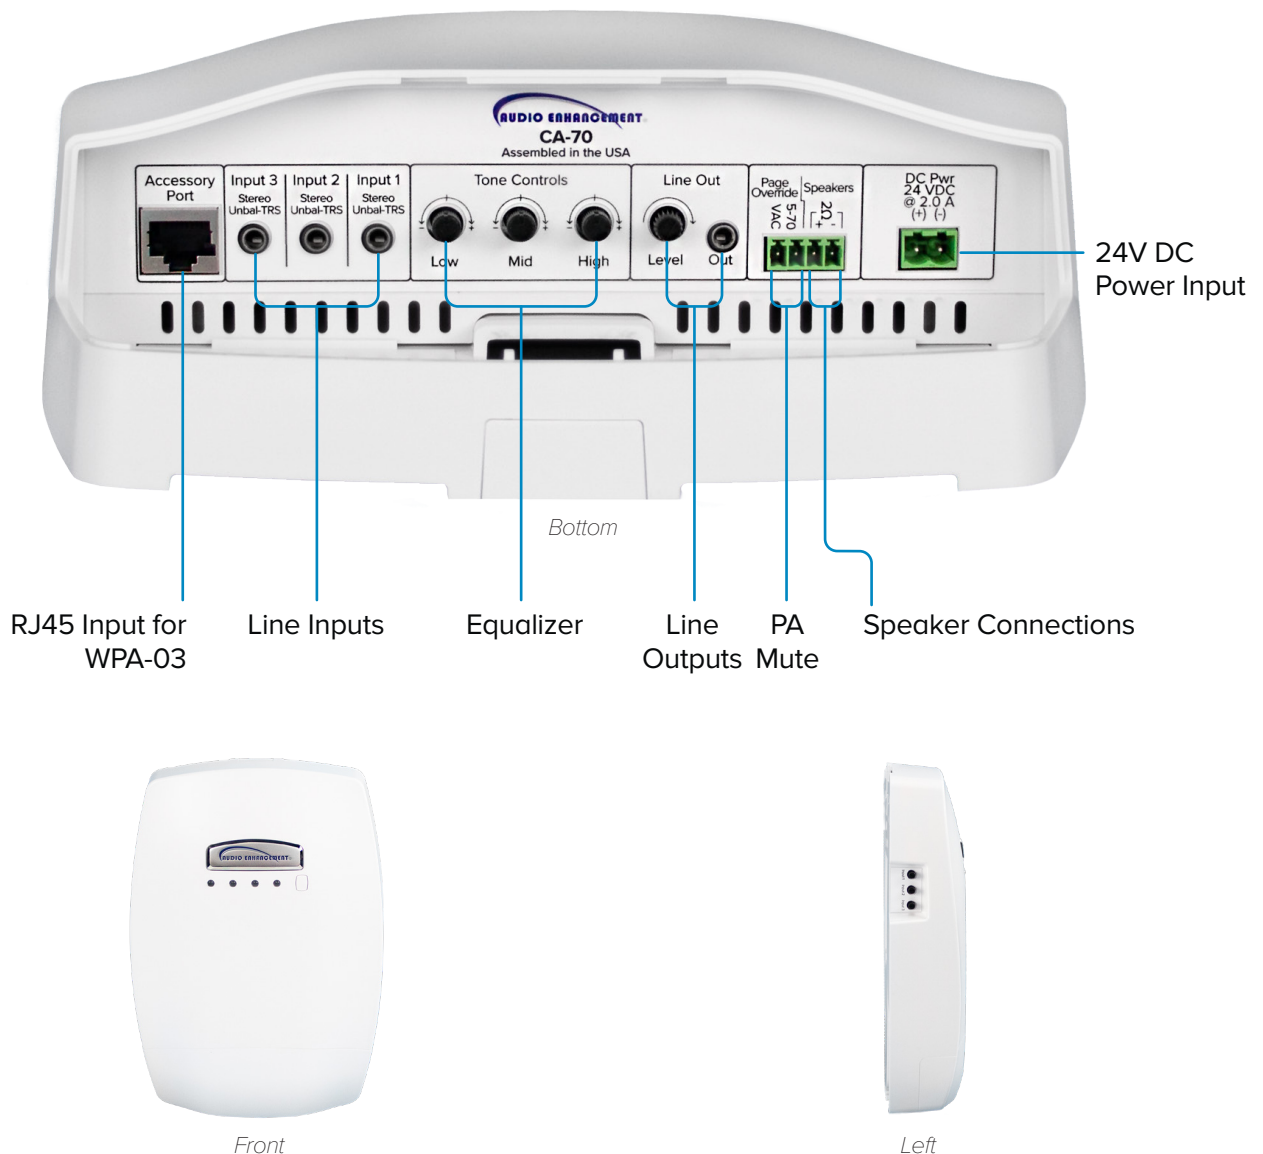

SPECIFICATIONS

CA-70 SENTINEL AMPLIFIER WITH INTEGRATED XD RECEIVER WITH POWER SUPPLY	
Audio Power	50W
Power Requirements	24V DC
Connectors	Automatic switching between front panel and rear panel input. (3) Variable Gain Line Inputs (1) Traditional Variable Gain Line Output - with front panel volume control + connector for assistive listening devices
PA Connector	Connects to Public Address System and mutes amplifier during announcements
Accessory Port	Accepts WPA-03 Remote Wall Plate that provides an additional input with level control and ALD output with level control
Equalization	3-Band equalizer (Bass, Mid, Treble)
Receiver Specifications	DECT Technology 1.9 GHz
Coverage	Adjustable for optimal coverage
Weight	2.15 lbs (34.40 oz)
Dimensions	12.25 (H) x 8.75 (W) x 2.75 (D) in (311.15 x 222.25 x 69.85 mm)

**The SAFE System (patent pending) is an alert notification system not intended to be a life-saving device or prevent emergencies. Audio Enhancement, our agents, employees, subsidiaries, affiliates and parent companies are exempt from liability for any loss, damage, injury or other consequence arising directly or indirectly from the application of our equipment. In the event of misuse or malfunction of the SAFE System or any of its components, Audio Enhancement, our agents, employees, subsidiaries, affiliates and parent companies are exempt from liability for any loss, damage, injury or other consequence arising directly or indirectly therefrom.*