



## **BEAM** SPEC SHEET

**BEAM** is a flexible compact solution that can be utilized via a cart mount, a portable stand, or wall mount. When using XD Microphones the BEAM encourages a equitable learning environment.

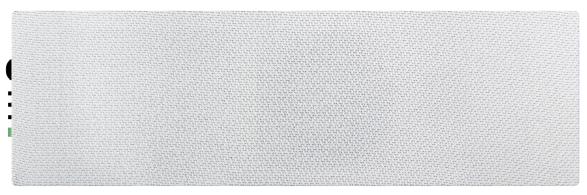

**Front View** 

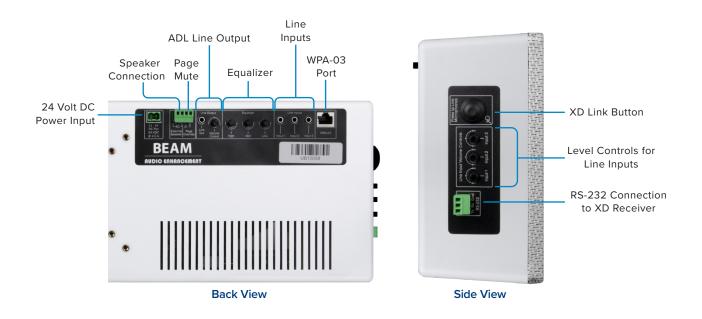

## SPECIFICATIONS

BEAM	
Audio Power	50 Watts
Power Requirements	24 VDC
Connections	4 Line Inputs
	3 Rear Panel
	1 WPA-03 Port
	2 Line/ALD Outputs
	1 Rear Panel with Volume Control
	1 WPA-03 Port
	Page Mute (Accepts 7-74 Volts AC. Mutes entire Blue Lion system on signal presence from paging system)
	WPA-03 Accessory Port
	External Speaker Output
	24 VDC Input
Equalization	3 Band Equalizer (Low, Mid, High)
System Frequency	XD Technology 1.9 GHz
Microphone Type	Unidirectional electret condenser microphone
Temperature Range	32° F - 104° F (0° C - 40° C)
General Signal to Noise Ratio	80 dB or More
Frequency Response	70 Hz to 15 kHz (-10dB)
VESA Mount	75x75 - 100x100
Weight	4 lbs (64 oz)
Dimensions	6.7 (H) x 22 (W) x 3.5 (D) in. (170.2 x 558.8 x 88.9 mm)

