


Angled View



Side Tap Switch

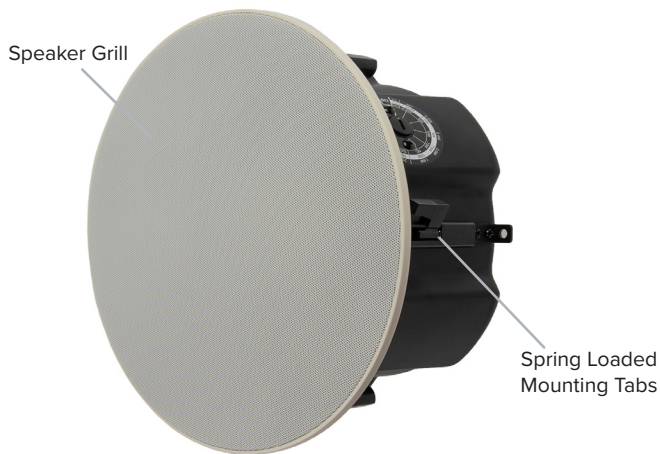


8Ω/25V/70V/100V Tap Switch

Back View



Tile Bridge

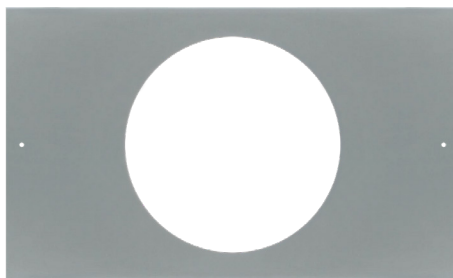

Included with each speaker

The **EPIC 70V Ceiling Speaker** is a fully assembled speaker assembly, including the back can and speaker grill. No need to assemble in the field, just cut the hole in the tile, place the tile bridge on the back of the tile, insert the speaker, flip the 5 spring loaded clips, and the installation is complete. The speaker has a tuned ported enclosure that provides superior bass response while maintaining a very high sensitivity. The transformer tap selector is easily accessible on the side of the speaker's back can. Spring-loaded speaker terminals make connection to speaker wire runs simple and easy. Metal speaker back meets UL 2043 criteria for plenum installation.



Speaker Specifications

Frequency Response (-10dB) (With Integral Back Can)	85 Hz - 16 kHz		
Power Handling	50 W continuous pink noise		
Sensitivity	96 dB (1W/1M)		
Transformer Tap Settings	8 Ohm - bypass		
Quality Triple Voltage Transformer	100 Volt Taps	70 Volt Taps	25 Volt Taps
	-	15.0 W	1.9 W
	15.0 W	7.5 W	0.9 W
	10.0 W	5.0 W	0.6 W
	5.0 W	2.5 W	0.3 W
	2.5 W	1.25 W	-
Plenum Rated Back Can	Speaker back can meets UL2043 criteria for plenum installation		
Mounting	5 Spring-loaded mounting tabs		
Speaker Wire Terminals	Spring loaded quick install terminals		
Tile Bridge Support	Stainless steel - 1 piece tile bridge		
Weight	71 lbs. (3.22 kg)		
Dimensions	Depth 6.25 in. (158.75 mm) Grill diameter 13.50 in. (342.90 mm) Mounting hole 11.50 in. (292.10 mm)		



Back can is RoHS and UL compliant.

