



# INFOVIEW DISPLAY

## SPEC SHEET

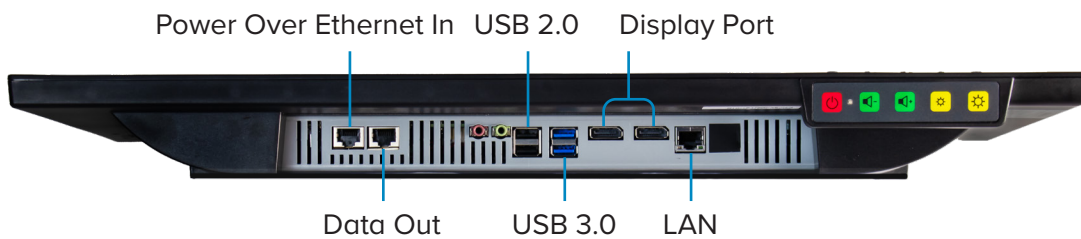

The EPIC System (Education Paging & Intercom Communications)® **InfoView Display** is a display device specifically designed for the K-12 campus. With a PoE powered 24" Full HD display this high-performance, energy-efficient, world-class visual messaging device delivers power and data over a single Ethernet cable, offering greatly increased flexibility with location and positioning.

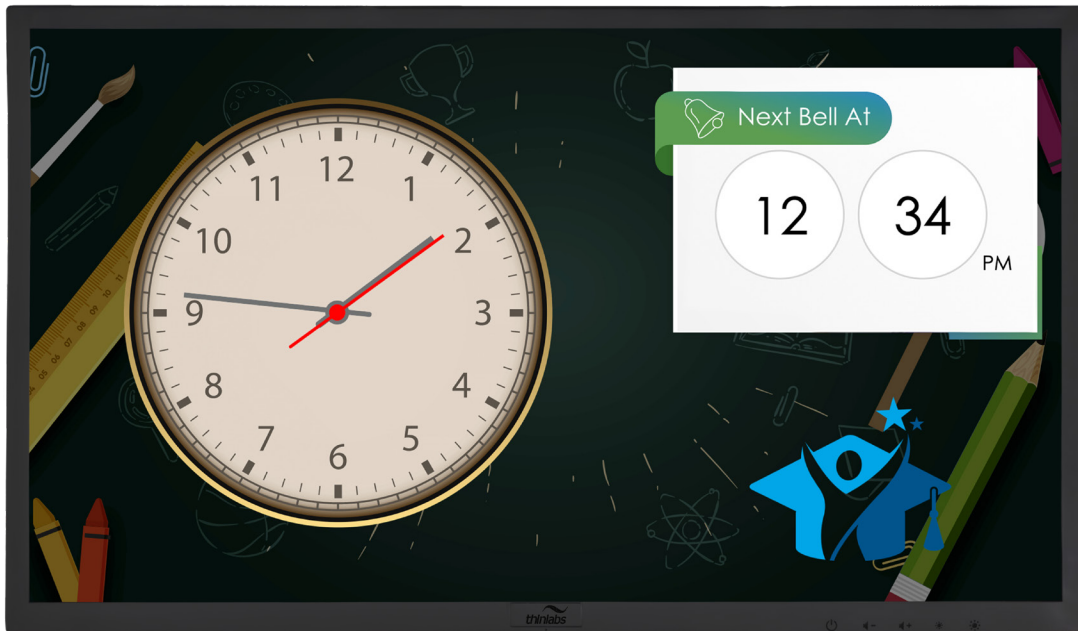

# SPECIFICATIONS

| INFOVIEW DISPLAY        |  |
|-------------------------|--|
| CPU                     | Ryzen Series Processing Technology   |
| Memory                  | 8 GB DDR4 2400 MHz   |
| Storage                 | 128 GB M.2 2280 SSD  |
| Network                 | 10/100/1000 Auto Sensing Megabit Ethernet (RJ45)                             |
| Audio                   | High Definition Audio Codec  |
| VESA Wall Mount         | 75 x 75 mm; 100 x 100 mm   |
| Warranty                | 1 Year Warranty on parts and labor against manufacturing defects             |
| Regulatory              | CE / FCC B / EN60950 / RoHS  |
| Recycle/Disposal        | Dispose of in Accordance with Local, State and Federal Laws                  |
| Resolution              | Up to 1920 x 1080, 32-bit Color  |
| Display                 | 24" Diagonal   |
| Aspect Ratio            | 16:9   |
| Graphics                | Integrated Graphics Engine   |
| POWER                   |  |
| Voltage                 | 12V, 5A DC (optional PoE 802.3AT+ or UPoE support available)                 |
| Consumption             | Average: Below 30W   |
| CONNECTORS              |  |
| LAN                     | (1) RJ45   |
| USB                     | (2) USB 3.0 and (2) USB 2.0  |
| Video                   | (1) HDMI   |
| Microphone In           | (1) 3.5 mm   |
| Headphone               | (1) 3.5 mm   |
| Power                   | 12V DC In  |
| SOFTWARE                |  |
| Operating System        | Thinlabs Embedded Linux  |
| Network Standards       | Local browser, Gigabit Ethernet, DHCP, Wake on LAN, Media Player, SSL, PPPoE |
| OPERATING CONDITIONS    |  |
| Temperature             | Operating: 41° - 95°F (5° - 35°C)<br>Storage: -10° - 140°F (-23° - 60°C)     |
| Humidity                | 10 - 90% (non-condensing)  |
| WEIGHT AND DIMENSIONS   |  |
| Weight - No Accessories | 15.60 lbs (249.60 oz)  |
| Dimensions              | 14.80 (H) x 20.87 (W) 6.81 in (376 x 530 x 173 mm)                           |