



# EPIC 70V CEILING SPEAKER

## SPEC SHEET

The **EPIC 70V Ceiling Speaker** is a fully assembled speaker, including the back-can and speaker grill. The speaker has a tuned ported enclosure and transformer tap selector that is easily accessible on the side of the speaker's back-can. Spring-loaded speaker terminals make installing speaker wire simple and easy.

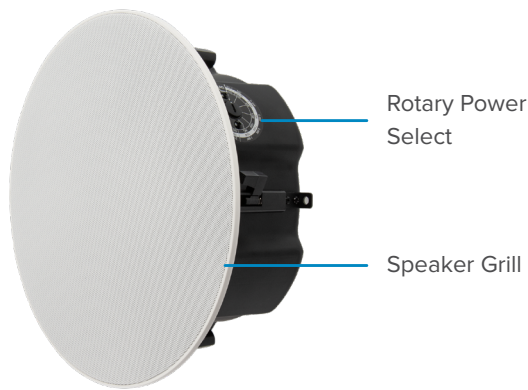

Side View

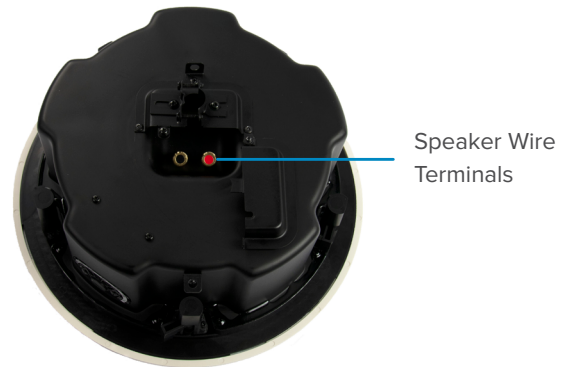

Back View

## SPECIFICATIONS

70V CEILING SPEAKER, CIRCLE CUT IN	
Frequency Response	85 Hz - 16 kHz
Power Handling	50W continuous pink noise
Sensitivity	96 dB (1W/1m)
Transformer	8 $\Omega$ - bypass 100V Taps (NC, 15W, 10W, 5W, 2.50W) 70V Taps (15V, 7.50W, 5W, 2.50W, 1.25W) 25V Taps (1.90W, 0.90W, 0.60W, 0.30W, NC)
Mounting	(5) Spring loaded mounting tabs. Accommodates tiles/drywall up to 19 mm (0.75 in) thick
Mounting Hole Diameter	11.50 in (292.10 mm)
Plenum Rated Back Can	Speaker back-can meets UL2043 criteria for plenum installation
Speaker Wire Terminals	Spring loaded quick install terminals
Tile Bridge Support	(1) Stainless steel tile bridge
Weight	7.10 lbs (113.60 oz)
Dimensions	13.50 (W) x 6.25 (D) in (342.90 mm x 158.75 mm)