


70V 2X2 TILE SPEAKER SPEC SHEET



The **70V 2x2 Tile Replacement Speaker** is a custom, fully assembled speaker. Enjoy crystal-clear audio in schools and district buildings. This speaker is designed to be a ceiling tile replacement speaker and fits into a standard grid ceiling. Includes four (4) secure tie-off tabs for additional security and meets UL2043 criteria for plenum installation.

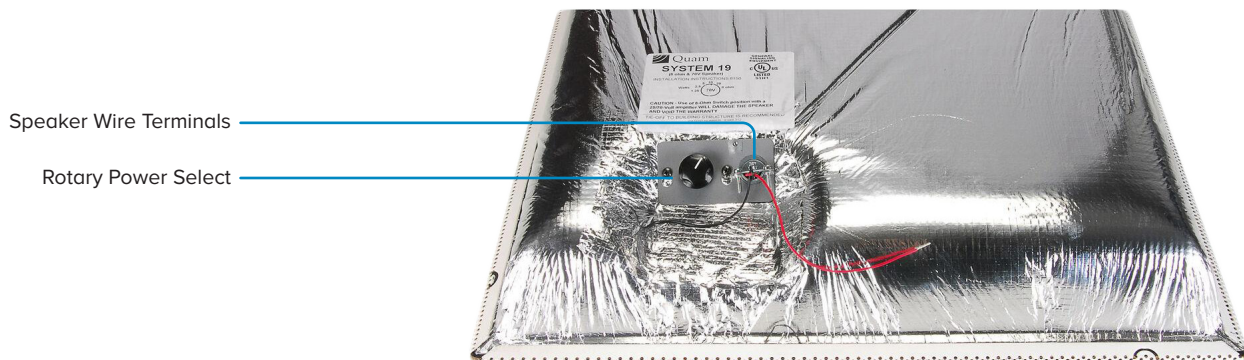

SPECIFICATIONS

70V 2X2 TILE REPLACEMENT SPEAKER	
Frequency Response	60Hz - 20kHz, EIA 426A Standard
Power Handling	30W RMS, EIA 426A Standard
Sensitivity	91 dB (1W/1M)
Impedance	8 Ohm nominal
Transformer	20W, 70V, Rotary select with 5 taps (1.25W, 2.5W, 5W, 10W, 20W) and 8 Ohm
Mounting	Lay in, tie-off tabs for additional mounting integrity (4)
Plenum Rated Back Can	Speaker back can, meets UL2043 criteria for plenum installation
Speaker Wire Terminals	8.50 in Color Coded Pre-Tinned Leads
Weight	8.20 lbs (131.20 oz)
Dimensions	3.50 (H) x 23.81 (W) x 23.81 (D) in (88.90 x 604.84 x 604.84 mm)