


XD TEACHER MICROPHONE

SPEC SHEET



The **XD Teacher Microphone** is the perfect teacher option for reaching every student in large spaces, classrooms with windows, libraries, and gymnasiums. Teachers can speak comfortably and clear, allowing every student to succeed no matter where they are in the room. Get the same great audio quality you've come to expect from Audio Enhancement®, in more teaching spaces than ever before!

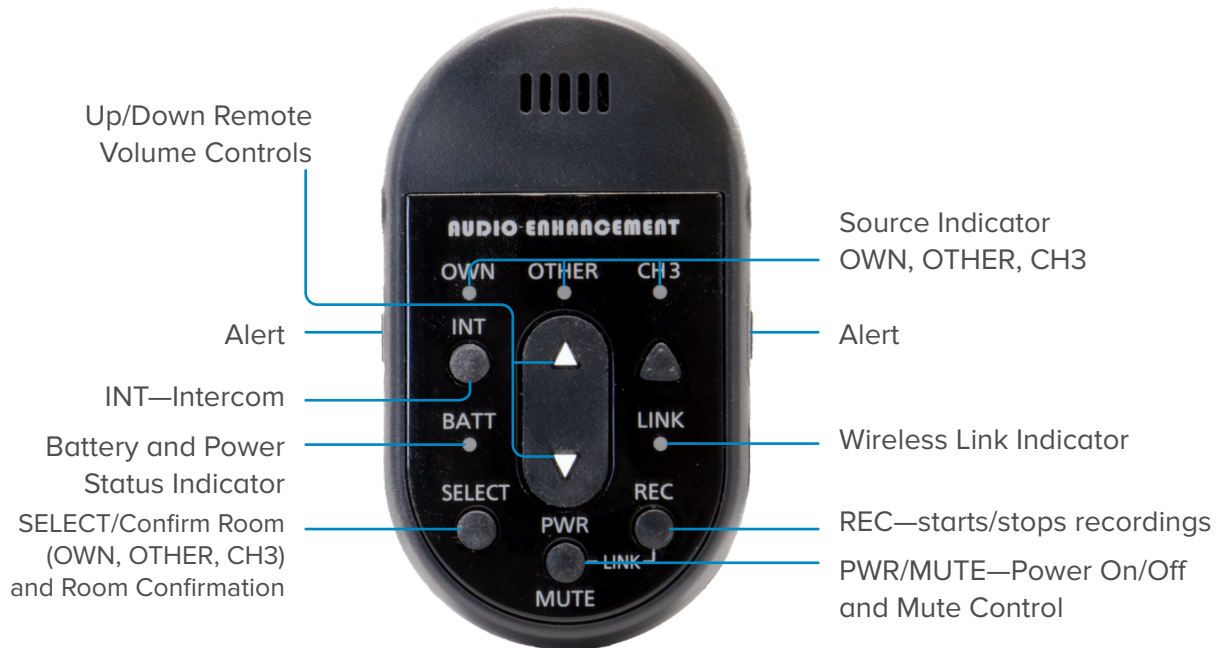

Front



Right Side View



Left Side View

SPECIFICATIONS

XD TEACHER PENDANT MICROPHONE	
Microphone Controls	PWR/MUTE: Power and Mute SELECT/Confirm Room: OWN - OTHER - CH3 and Room Confirmation Up/Down Arrows: Volume control REC/Record: Manually start/stop video recording INT/Intercom: Initiate an intercom session Alert: Initiate an alert Emergency Security Function (SAFE System*)
LEDs	OWN/OTHER/CH 3: Input Select <ul style="list-style-type: none"> • Green – Microphone input is selected • LED turns off after 5 seconds BATT: Battery Status <ul style="list-style-type: none"> • Green – Power is on, Mic is Charged and USB-C cable is disconnected • Red – Battery is Charged if the USB-C cable is connected • Red Blink – Charging, USB-C cable must be connected to charge LINK: Wireless Link <ul style="list-style-type: none"> • Red Blink – Mic is not linked to XD Receiver • Yellow Blink – Mic is connecting to XD Receiver • Green – Mic is linked to XD Receiver • OFF – While battery is charging (LINK is disabled during charging)
System Frequency	DECT Technology 1.9 GHz
Coverage	Optimal coverage from small classrooms to cafes, gyms and other large spaces
Microphone Type	Unidirectional electret condenser microphone
Microphone In	Line Level 3.5 mini jack (plug-in power compatible)
Audio In	Line Level 3.5 stereo mini jack (monaural mix)
Battery Type	Lithium-Ion Battery (rechargeable)
Talk Time	8 - 10 Hours
Charge Time	~4 Hours (5V/500mA)
Charging Method	USB-C charger (supplied)
Temperature Range	Storage: -40 - 158° F (-40° - 70° C)/ 10-90% non-condensing Operating: 41° - 95° F (5° - 35° C)/ 10-90%
Weight	0.11 lbs (1.80 oz)
Dimensions	3.31 (H) x 1.89 (W) x 0.63 (D) in (84 x 48 x 16 mm)

*The SAFE System (patent pending) is an alert notification system not intended to be a life-saving device or prevent emergencies. Audio Enhancement, our agents, employees, subsidiaries, affiliates and parent companies are exempt from liability for any loss, damage, injury or other consequence arising directly or indirectly from the application of our equipment. In the event of misuse or malfunction of the SAFE System or any of its components, Audio Enhancement, our agents, employees, subsidiaries, affiliates and parent companies are exempt from liability for any loss, damage, injury or other consequence arising directly or indirectly therefrom.