



## Angled View



## Side View

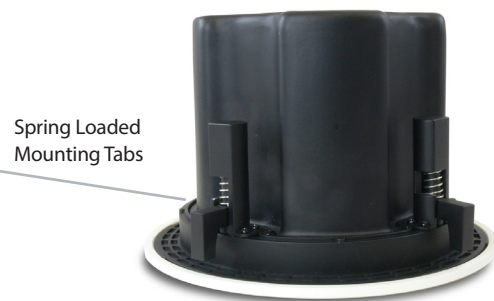


## Tile Bridge

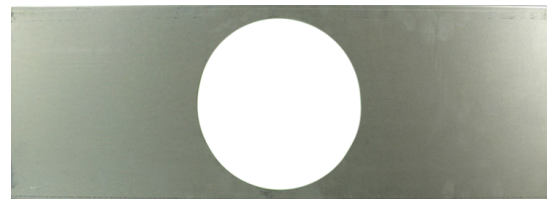

Included with each CS-12 speaker.

The **Ceiling Speaker** (CS-12) has a tuned ported enclosure that provides superior bass response while maintaining efficiency. Speaker grill comes pre-installed from factory. Spring-loaded mounting tabs make for easy and secure installation. Metal speaker back meets UL 2043 criteria for plenum installation. All metal, spring-loaded terminals provide easy and convenient attachment of speaker wires.

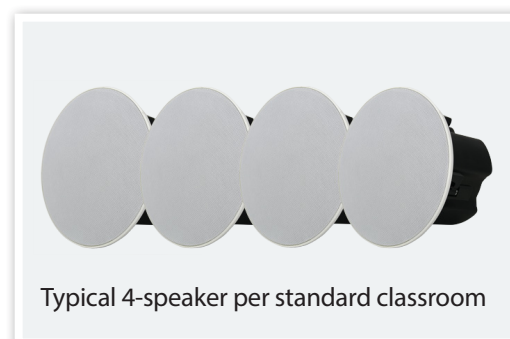



## Speaker Specifications

Frequency Response	70 Hz to 15 kHz (-10dB) 100 Hz to 14 kHz +/- 2 dB
Power Handling	50 W continuous pink noise
Sensitivity	88 dB 1 Watt / 1 meter
Impedance	8 Ohms nominal
Type	Vented enclosure
Mounting	Spring-loaded mounting tabs
UL 2043	Speaker back can meets UL 2043 criteria for plenum installation
Weight	3.0 lbs. (1.36 kg)
Dimensions	Depth 5.8 in. (147.3 mm) Grill Diameter 8.5 in. (216.0 mm) Mounting hole 7.0 in. (178.0 mm)



Back can is RoHS and UL compliant.

