



Top View

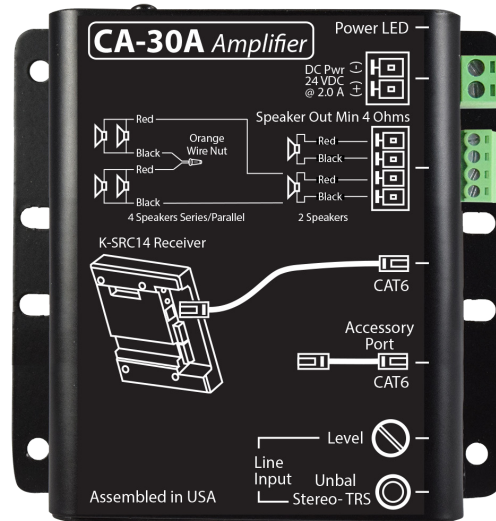

Front View

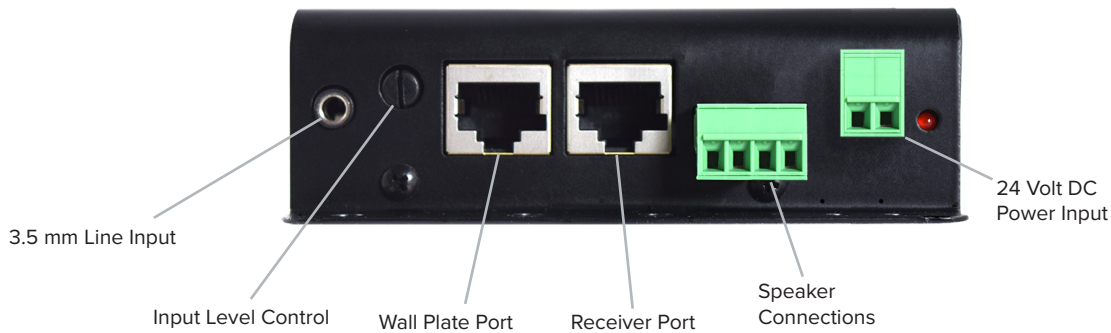

The CA-30A is designed to complement projectors or flat panel displays to provide high quality playback of multimedia audio. The CA-30A amplifier is the perfect solution for evenly distributing music and other auxiliary sound throughout a classroom at an affordable price.

- Versatile mounting system
- Mounts directly to projector poles
- Mount in plenum rated ceiling enclosures or inside cabinets
- Plug and play compatibility with Audio Enhancement's XD classroom microphones





CA-30A Amplifier Specifications*

Electrical Characteristics:

Output Power

THD @ 1% (4 Ohm load)	16 Watts
-----------------------	----------

Frequency Response	20 Hz to 20,000 kHz
--------------------	---------------------

Connectors	One 3.5 mm input with volume control Accessory port (RJ-45) with balanced line input unbalanced line output RJ-45 input for XD Receiver (K-SRC14), provides both audio and power 24 Volt DC Power Input Speaker connection
------------	---

Material	Metal
----------	-------

Weight	.45 lbs (7.2 oz)
--------	------------------

Dimensions	3.65 in. (L) x 4.325 in. (W) x 1.261 in. (H) (9.271 cm x 10.986 cm x 3.203 cm)
------------	--
