


Angled View



Back View

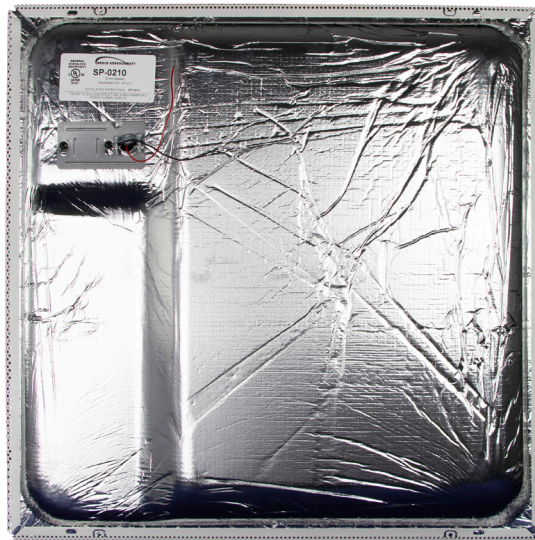

Tie-Off Tabs

Wiring Access



The **FS-21 2x2 Flat Panel Speaker** is a custom, fully assembled speaker. Enjoy crystal-clear audio in schools and district buildings. No need to assemble or cut tiles in the field—just lay in the ceiling tile grid, and secure tie-off tabs for additional security. Meets UL2043 criteria for plenum installation.



## Speaker Specifications



Frequency Response	70 Hz - 15 kHz (-10 dB) 100 Hz - 14 kHz +/-2 dB
Power Handling	50 W continuous pink noise
Sensitivity	88 dB (1W/1M)
Impedance	8 Ohm nominal
Type	Vented Enclosure
Mounting	Lay in, four tie-off tabs for additional mounting integrity
Plenum Rated Back Can	Speaker back can meets UL2043 criteria for plenum installation
Speaker Wire Terminals	Speaker wires
Weight	5.8 lbs. (2.64 kg)
Dimensions	Height 24 in. (609.6 mm) Width 24 in. (609.6 mm) Depth 3.75 in. (95.25 mm)



Back can is RoHS and UL compliant.

