


CEILING SPEAKER (CS-12)

SPEC SHEET



The **Ceiling Speaker (CS-12)** features a tuned, ported enclosure that delivers superior bass response while maintaining efficiency. The speaker grill is pre-installed at the factory for added convenience, while spring-loaded mounting tabs ensure quick and secure installation. The metal speaker back-can of the CS-12 complies with UL 2043 standards for plenum installation, and the all-metal spring-loaded terminals make connecting speaker wires easy and hassle-free.

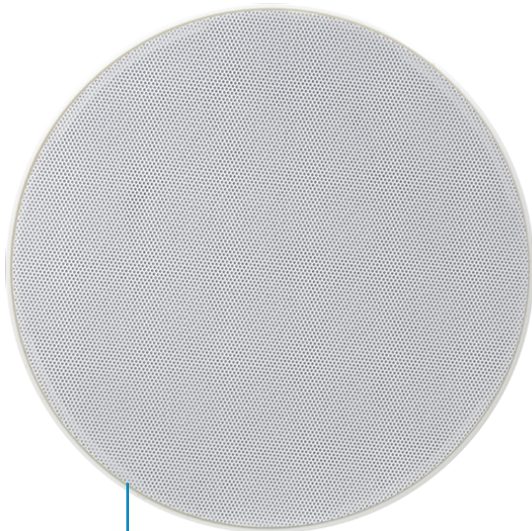

Front View


Speaker Grill



Side View

Spring Loaded
Mounting Tab

Spring Loaded
Mounting Tab

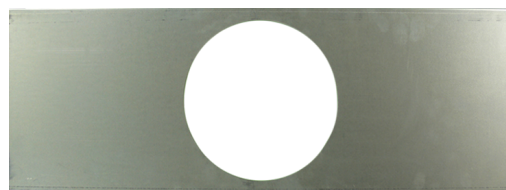

Tile Bridge included with each CS-12 Speaker

SPECIFICATIONS

CEILING SPEAKER (CS-12)	
Frequency Response	70 Hz to 15 kHz (-10 dB) 100 Hz to 14 kHz (+/-2 dB)
Power Handling	50 W continuous pink noise
Sensitivity	88 dB 1 W/1 m
Impedance	8 Ω nominal
Type	Vented enclosure
Mounting	(5) Spring loaded mounting tabs. Accommodates tiles/drywall up to 19 mm (0.75 in) thick
UL 2043	Speaker back-can is UL 2043 compliant for plenum installation
Weight	3 lbs (1.36 kg)
Dimensions	8.50 (H) x 8.50 (W) x 5.80 (D) in (215.90 x 215.90 x 147.32 mm)