


EPIC SYSTEM KIOSK 2.0

SPEC SHEET



The **EPIC System Kiosk** is a compact computing device specifically designed to power the front-end interactions of EPIC (Education Paging and Intercom Communications) System®. The Kiosk features a 21.5" full HD multi-touch display. The EPIC System Kiosk also includes a paging microphone that provides crystal-clear audio, ensuring important messages will be heard clearly by their intended recipients.

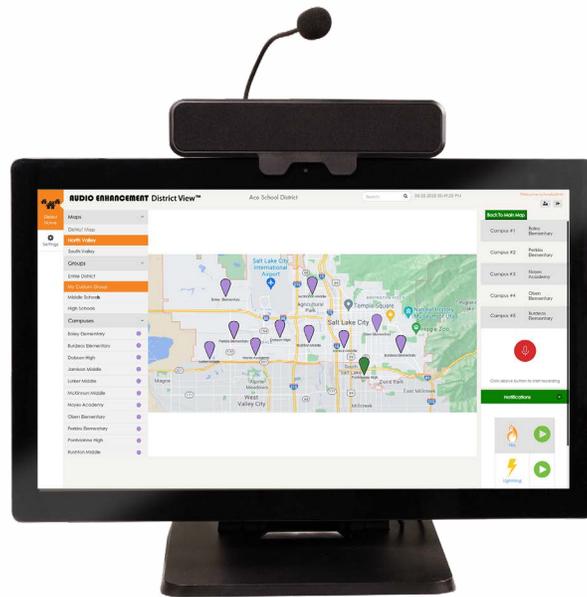

Front

LAN (Ethernet)



Back

DC In

USB-A

Speaker Controls



Top

SPECIFICATIONS

EPIC SYSTEM KIOSK 2.0	
Part Number	EP-0058
CPU Processor Type	Qualcomm Snapdragon QCS6490
Color	Black
Ports	(4) Micro USB, (1) RJ45, (1) DC Power
Networking	RJ45 Ethernet
Memory	8 GB
Storage	64 GB
OS	Embedded Android with Dedicated Kiosk Browser
Size	21.5" diagonal
Panel Type	Active matrix TFT LCD (LED)
Resolution	1920 x 1080 @ 60Hz
Touch Technology	PCAP (TouchPro® Projected Capacitive), 10-point touch
External Speakers	Dedicated Speaker Bar with Integrated Array Microphone (3 W Nominal, 5 W Max)
Power Consumption	15.2 W
Voltage	AC 100-240V (Universal), 50-60Hz
Viewing Angles	178° horizontal, 178° vertical
Regulations	UL/cUL (US), FCC (US), IC (Canada), CE (Europe), CB (International)
Frequency Response	Speaker Bar 280Hz - 20KHz
VESA Compatible	VESA 75 mm and 100 mm
Weight	Net 15 lbs. (6.8 kg) / Gross 25 lbs (11.4 kg)
Packaging Dimensions	18" (H) x 24" (W) x 18" (D) (609.6 x 457.2 x 457.2 mm)
Kiosk Dimensions	12.8" (H) x 20.7" (W) x 1.2" (D) (524.8 x 324.8 x 29.7 mm)
Operating Temperature	32 °F to 104 °F / 0 °C to 40 °C
Storage Temperature	-4 °F to 122 °F / -20 °C to 50 °C

Audio Enhancement products are RoHS and UL compliant. Kiosk Specifications

*EPIC System Kiosk Paging Microphone is not UL Listed