


# IP Outdoor Horn Speaker

## Spec Sheet

The Audio Enhancement® **IP Outdoor Horn Speaker** is a rugged, 25 Watt network-connected paging and notification speaker designed for clear speech intelligibility in noisy, indoor, outdoor, and semi-exposed environments. With a high-output re-entrant horn design, integrated digital audio processing, and PoE+ network connectivity, it provides a compact solution for EPIC (Education Paging & Intercom Communications) System® paging and alerts, where dependable sound projection and weather-resistant construction are required.

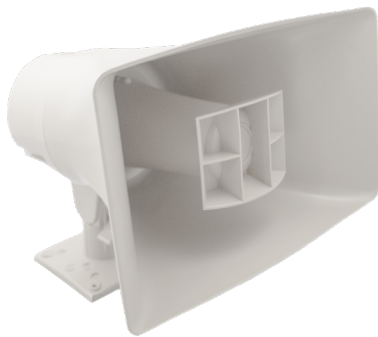

## Specifications

| SP-1105, IP Outdoor Horn Speaker |                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating                     | 25 W max PoE+                                                                                                                                               |
| Sensitivity                      | 110 dB SPL (1W/1m)                                                                                                                                          |
| Frequency Response               | 370 Hz - 6800 Hz on-axis                                                                                                                                    |
| Peak Audio Output                | 124 dB SPL 25 W/1 m                                                                                                                                         |
| Coverage Angle                   | 60° Included Angle -6dB/2kHz, Half Space                                                                                                                    |
| Power Source                     | PoE+ (IEEE 802.3at) 30.0 W                                                                                                                                  |
| Network Interface                | 10/100 Mbps Ethernet Base-T (RJ45, Cat6)                                                                                                                    |
| Onboard Storage                  | Integrated SDRAM and secure SD card slot                                                                                                                    |
| Overall Form Factor              | Wall mount re-entrant horn enclosure                                                                                                                        |
| Baffle Finish                    | White Impact and UV resistant ABS horn and cover. High stability, UV resistant polycarbonate for driver and mounting components. Stainless steel fasteners. |
| Warranty                         | 3-year warranty                                                                                                                                             |
| Dimensions                       | 13.00 (H) x 12.25 (W) x 31.50 (D) in (330.20 x 311.15 x 800.10 mm)                                                                                          |
| Weight                           | 3.25 lbs (1.47 kg)                                                                                                                                          |